



Key Feature

- 10.1-inch colorful touch screen with resolution 1024 × 600
- Supports Android app installation
- Open platform for the third-party software integration
- Video intercom & live view on mobile phone all-day
- Built-in Hik-Connect for all-in-one management
- Wireless intrusion panel for on-site management
- Receives 7 seconds of video verification from alarm systems

Specification


| System parameters | |
|----------------------------|-----------------------------------|
| Operation system | Embedded Android operation system |
| Flash | 8 GB Emmc |
| RAM | 1 GB |
| CPU | Embedded processor |
| Display parameters | |
| Size | 10.1-inch |
| Operation method | Capacitive touch screen |
| Type | Colorful IPS |
| Resolution | 1024 × 600 |
| Video parameters | |
| Video compression standard | / |
| Lens | / |

| FOV | / |
|----------------------------|---|
| WDR | / |
| Pixel | / |
| Focal length | / |
| Audio parameters | |
| Audio input | Built-in omnidirectional microphone |
| Audio compression standard | G.711 U, G.711 A |
| Audio output | Built-in loudspeaker |
| Audio compression bitrate | 64 Kbps |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | |
| Linked IPC | 16 |
| Linked indoor extensions | 5 |
| Notices | 200 |
| Linked doorphone | 8 |
| Network parameters | |
| Communication protocol | TCP/IP, SIP, RTSP |
| Wired network | Support |
| Wi-Fi | Wi-Fi 802.11 b/g/n |
| Bluetooth | / |
| 3G/4G | / |

| | |
|--------------------------|---|
| Zigbee | / |
| Device interfaces | |
| Alarm input | 8 |
| TAMPER | / |
| Network interface | 1 RJ-45 10/100 Mbps self-adaptive |
| RS-485 | 1 |
| USB | For debug only |
| TF card | Max to 32 G, SD 2.0 or lower version |
| Alarm output | 2 |
| Power interface | 1 |
| General | |
| Button | / |
| Installation | Surface mounting |
| Indicator | / |
| Weight | Without package: 875 g With package: 1060 g |
| Protective level | / |
| Power supply method | IEEE802.3af, standard PoE 12 VDC, 1 A |
| Working temperature | -10 ° C to 50 ° C (14 ° F to 122 ° F) |
| Working humidity | 10% to 90% |
| Dimensions | 254 mm × 166 mm × 26.65 mm (10.0" × 6.54" × 1.05") |
| Battery | / |
| Power supply | IEEE802.3af, standard PoE 12 VDC, 1 A |
| Application environment | Indoor |
| Power consumption | ≤ 8 W |

| No. | Description | No. | Description |
|-----|------------------------|-----|--------------------|
| 1 | Screen | 7 | Debugging Port |
| 2 | Microphone | 8 | microUSB Interface |
| 3 | Unlock Button | 9 | Loudspeaker |
| 4 | Power Supply Interface | 10 | Reserved |
| 5 | Alarm Terminals | 11 | TAMPER |
| 6 | RS-485/Relay Interface | 12 | Network Interface |


Dimension

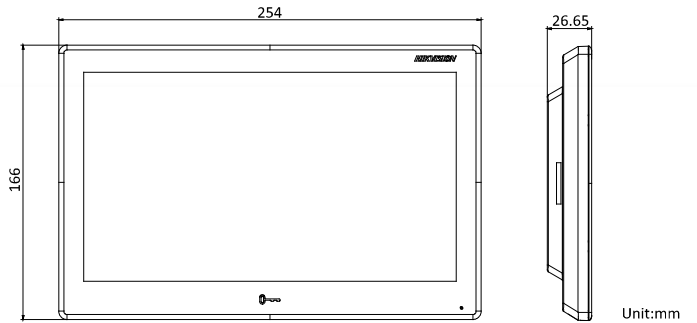

Available Model

DS-KH9510-WTE1

Physical Interface

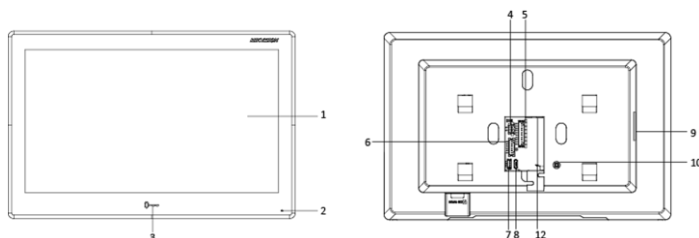

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-800-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-8690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-8902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikla.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6604-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-10131-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com