


CODE: **AWO359** v1.1
 NAME: **LED/B-M**

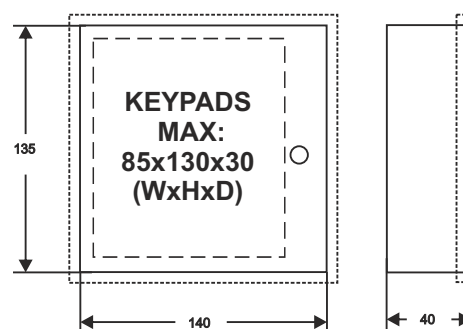

DESTINATION

SATEL

KEYPADS: CA-5 KLED-S, CA-6 KLED-S, CA-10 KLED-S, INTEGRAS, (CZ-EMM)

PARADOX

KEYPADS: LED 616

PYRONIX

KEYPADS: FP 12030 MX-ICON 9 (LCD)

TECHNICAL DATA

Casing dimensions:	internal: W=140, H=135, D=40 external: W1=145, H1=140 [mm, +/-2]
Keypads dimensions:	max: W=85, H=130, D=30 [mm, +/-2]
Weight net/gross:	0,60kg / 0,65kg [+/-0,1kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	lockable (MR 008 - different code)
Notes:	removable back mounting plate
Certification, declaration:	RoHS