


TD-9525C2

2MP Full-Color Turret Network Camera



- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080
- 30~ 40m supplement light range
- 24/7 full color imaging
- 3D DNR, HWDR, HLC and BLC
- ROI coding
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics

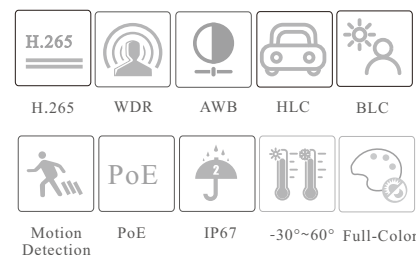

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Specifications	Model	TD-9525C2
Camera		
Image Sensor	1 / 2.8 "CMOS	
Image Size	1920 × 1080	
Electronic Shutter	1 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.002 lux@ F1.0, AGC ON; 0 lux with LED ON	
S/N Ratio	≥50dB	
Lens	2.8~12 mm @F1.4	
Field of View	Horizontal: 105.4~34°; Vertical: 54.8~19.1°; Diagonal: 126~39°	
Focus	Motorized	
Lens Mount	Φ14	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Defog	No	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°	
Image		
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, 640 × 480, CIF, 480 × 240	
Main Stream	60Hz: 1080P(1~30fps)/720P(1~30fps); 50Hz: 1080P(1~25fps)/720P(1~25fps)	
Sub Stream	60Hz: D1/CIF/640 × 480 (1~30fps); 50Hz: D1/CIF/640 × 480 (1~25fps)	
Third Stream	60Hz: D1/CIF/480×240 (1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)	
Bit Rate	128 Kbps ~ 6 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ 45	
Video Output	NO	
Audio	1CH audio input; 1CH built-in MIC	
Storage	Built-in micro SD card slot, up to 256GB	
Reset	Yes	
Functions		
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP	
Web Browser	IE(plugin required)/Google Chrome/Edge/Firefox/Safari	
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS	
Interface Protocol	ONVIF	
Storage	Network remote storage; micro SD card storage	
Intelligent Analytics	Video exception detection, intrusion detection and line crossing detection, abandoned/missing object detection	
Smart Alarm	Motion detection, SD card error, SD card full	
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern	
PoE	Yes (IEEE802.3af)	
Supplement light Range	IR range: 30 ~ 40 m White light range: 30 ~ 40 m	
Ingress Protection	IP 67	


DORI Distance

Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	41.67m(136.71ft)	16.66m(54.65ft)	8.33m(27.32ft)	4.16m(13.64ft)
2.8~12mm(T)	128.38m(421.19ft)	51.35m(168.47ft)	25.67m(84.21ft)	12.83m(42.09ft)
Others				
Power Supply	DC12V/PoE			
Power Consumption	< 10W			
Storage Conditions	- 30 °C ~ 65 °C (-22 °F ~ 149 °F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	- 30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	Φ 111.6 × 99.6			
Weight (net)	Approx. 0.66KG			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)			

DIMENSIONS

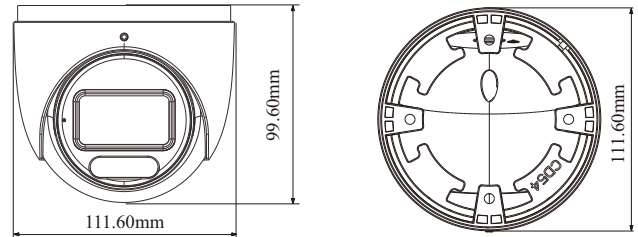

AVAILABLE ACCESSORIES

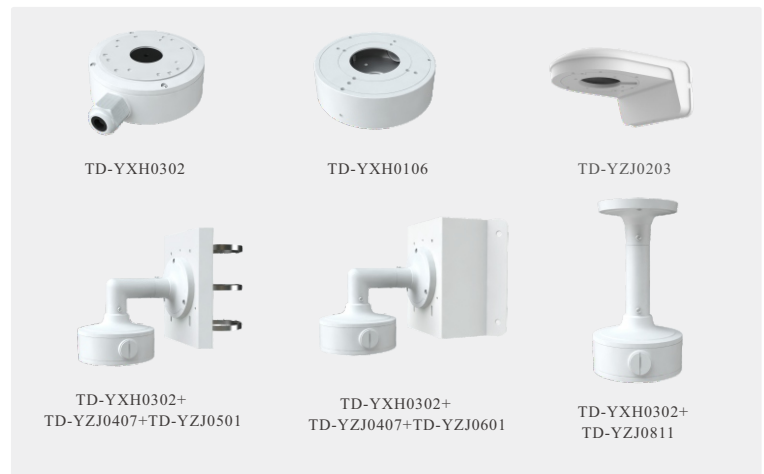

AVAILABLE MODEL

Available Model	TD-9525C2(D/AZ/PE/AW3)	Motorized lens
-----------------	------------------------	----------------